

GEDORE

TOOLS FOR LIFE

Internal Puller, Ø 16-18mm



KL-0043-341



0043-341e170316

GEDORE Automotive GmbH


Breslauer Straße 41
78166 Donaueschingen

Postfach 1329
78154 Donaueschingen - GERMANY

Phone.: +49 (0) 771 / 8 32 23-0
Fax: +49 (0) 771 / 8 32 23-90

Email: info@gedore-automotive.com
Internet: www.gedore-automotive.com

KL-0043-341

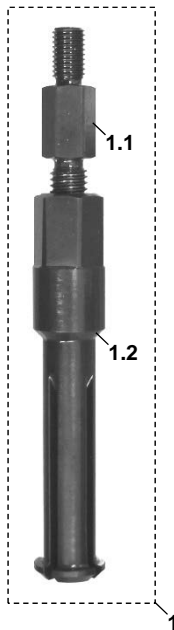

Example of use:



KL-0043-341 Internal Puller, Ø 16-18mm

Applicable to VW-Audi 1.2, 1.4, 1.6, 1.8 TSI / TFSI and 1.6, 1.9 TDI engines with a 7-speed 0AM dual clutch gearbox (dry clutch);

as found in: Audi A1 (8X1), A3 (8P1, 8P1, 8PA); Seat Altea (5P1) Altea XL (5P5, 5P8) Ibiza V (6J5, 6J1, 6J8), Leon (1P1) Toledo III (5P2); Skoda Fabia II (54), Octavia (1Z3, 1Z5), Superb (3T4, 3T5); VW Golf Plus (5M1, 521), Golf V (1K1, 1K5), Golf VI (5K1, 517, AJ5), Jetta III (1K2), Passat (362, 365, 3C2, 3C5), Passat CC (357), Polo (6R), Scirocco (137), Touran (1T1, 1T2, 1T3) etc.

Field of Application

Used in conjunction with the **GEDORE counter-support brace 1.36/1 (Code-Nr. 8016580)**, the internal puller allows for the easy and professional removal of pilot/guide bearings from vehicles equipped with a **7-speed 0AM** dual clutch gearbox.

The collet made of high-grade special steel allows the internal puller to be securely held in the pilot/guide bearing.

Scope of Delivery

Pos.	Part No.	Description	Qty
1	KL-0043-341	Internal Puller, Ø 16-18mm	1
composed of:			
1.1	KL-0043-3413	Expanding Bolt, M10	1
1.2	KL-0043-3411	Collet, Ø 16-18mm	1



Warnings and Notes

- Any work on vehicles should only be performed by qualified specialist personnel observing and complying with the directions, provisions, and safety regulations specified by the vehicle manufacturer!
- Always refer to the vehicle manufacturer's data and instructions as only these apply to all work that is carried out on the vehicle.

Example of Use:

1. Insert internal puller '1' into pilot/guide bearing.
2. By tightening expanding bolt '1.1', preload collet '1.2' so as to allow the claws of the collet to grip behind the bearing inner race.
Note: Counter-hold collet '1.2' while tightening.
3. Via expanding bolt '1.1', completely screw GEDORE counter-support brace 1.36/1 onto internal puller '1'.
4. Firmly hold toggle on counter-support brace 1.36/1 and pull out bearing by tightening the nut.

Accessory:

GEDORE Counter-Support Brace 1.36/1
(Code No. 8016580)