

KL-0282-540

High-Pressure Pump Wheel Puller




PRODUCT DESCRIPTION

KL-0282-540 - High-pressure pump wheel puller

Suitable for pump wheels on the diesel high-pressure pump in VW, Audi, Seat and Skoda with 1.4, 1.6, 2.0l TDI engines. Installed e.g. on Audi A1 (8X), A3 (8V), A4 (8K), A4 (B9, 8W), A5 (8F, 8T, F5), A6 (4G, 4A), Q2 (GA), Q3 (8U, F3), Q5 (8R, FY), TT (FV); Seat Alhambra (71), Ateca (KH), Leon (5F), Tarraco (KN), Toledo IV (KG); Skoda Karoq (NU, ND), Kodiaq (NS, NV), Octavia III + IV (5E/NL/NR, NX/NN), Rapid (NH, NK, NK), Superb III (3V), Yeti (5L); VW Arteon (3H), Beetle (5C), Caddy IV (SA), Passat CC (358), Crafter (2E, 2F), Golf VI Cabriolet (517), Golf VII (5G, BQ, BE, BA, BV, AM, AN), Jetta IV (162, 163, AV), Passat B8 (3G, CB), Scirocco III (137, 138), Sharan (7N), Tiguan (5N, AD/AX/BW/BJ), Touran (5T), T-Roc (A1, D1).

For quick, professional removal of the pump wheel, in particular the hub, on the diesel high-pressure pump.

Required when removing and installing the high-pressure pump.

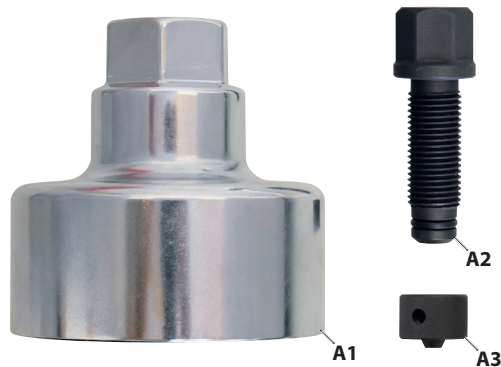

Scope of delivery / single part overview

Item	Part no.	Description	Qty.
A	KL-0282-540	High-pressure pump wheel puller	1
A1	KL-0282-5401	Housing	1
A2	KL-0282-5402	Spindle with O-ring	1
A3	KL-0282-5403	Thrust piece	1

Specifications

Drive (hexagon):	15.0mm
Counterholding (hexagon):	24mm
Length:	80mm
Width:	64mm
Weight:	540g

SAFETY INSTRUCTIONS AND REGULATIONS

- ✔ Read and understand this product information **before using** the special tool. This serves to familiarise you with the special tool for **safe use!**
- ✔ Use the special tool **as intended** and **always** carry out maintenance and repair work in compliance with the regulations on occupational safety and accident prevention as well as the vehicle manufacturer's instructions!
- ✔ **Before each use**, check the special tool **carefully** for damage, loose parts, or unauthorised modifications. **Never** use it, if you notice any such deficiencies!
- ✔ **Prior to each use**, check the moving parts and threads of the special tool for dirt. If necessary, clean and lubricate them **only** with molybdenum disulphide paste, such as **KL-0014-0030!**
- ✔ **Always** wear your personal protective equipment, e.g. safety goggles, protective gloves, safety shoes, during work if necessary!
- ✔ Interrupt your work **immediately** if you are unsure about using the special tool, and contact **GEDORE Automotive GmbH if necessary!**
- ✔ Dispose of the special tool and its packaging material in an environmentally compatible way in accordance with the legal requirements. If necessary, ask your local authorities or **GEDORE Automotive GmbH** about environmentally friendly disposal options!